

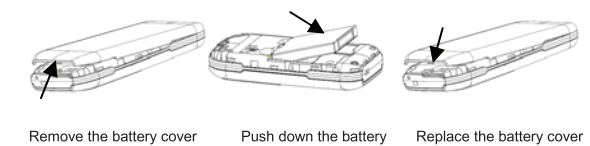







<div>LEGAL INFORMATION</div> <div>Copyright © 2011 ZTE CORPORATION.</div> <div>All rights reserved.</div> <div>No part of this publication may be excerpted, reproduced, translated or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without the prior written permission of ZTE Corporation.</div> <div>The manual is published by ZTE Corporation. We reserve the right to make modifications on print errors or update specifications without prior notice.</div>	<div>Security</div> <div><ul style="list-style-type: none">To protect your mobile phone from illegal use, take the security measures as follows:<ul style="list-style-type: none">Set PIN codes of the SIM card.Set handset lock code.Set call restrictions.</div> <div>Safety Precautions</div> <div>This section includes some important information on safe and efficient operation. Please read this information before using the phone.</div> <div>Operational Precautions</div> <div><ul style="list-style-type: none">Please use your phone properly. When making or receiving a call, please hold your phone as holding a wireline telephone. Make sure that the phone is at least one inch (about two point five centimeters) from your body when transmitting.Do not touch the antenna when the phone is in use. Touching the antenna area affects call quality and may cause the phone to operate at a higher power level than needed.Some people may be susceptible to epileptic seizures or blackouts when exposed to flashing lights, such as when watching television or playing video games. If you have experienced seizures or blackouts, or if you have a family history of such</div> <div>1</div>	<div>shielded from RF(radio frequency) energy.</div> <div><ul style="list-style-type: none">In those facilities with special demand, such as hospital or health care facilities, please pay attention to the restriction on the use of mobile phone. Switch off your phone if required.</div> <div>Mobile Phone</div> <div><ul style="list-style-type: none">Please use original accessories or accessories approved by the phone manufacturer. Using any unauthorized accessories may affect your mobile phone's performance, damage your phone or even cause danger to your body and violate related local regulations about telecom terminals.Turn off your phone before you clean it. Use a damp or anti-static cloth to clean the phone. Do not use a dry cloth or electrostatically charged cloth. Do not use chemical or abrasive cleaners as these could damage the phone.As your mobile phone can produce electromagnetic field, do not place it near magnetic items such as computer disks.Using the phone near electrical appliances such as TV, telephone, radio and personal computer can cause interference.Do not expose your mobile phone to direct sunlight or store it in hot areas. High temperatures can shorten the life of electronic devices.Keep your phone dry. Any liquid may damage your phone.Do not drop, knock or harshly treat the phone. Rough handling can break internal circuit boards.</div> <div>3</div>	<div>shouldn't be affected by wireless transmission. If you do meet problems above, please contact your automobile provider. Do not place your phone in the area over an airbag or in the airbag deployment area. Airbags inflate with great force. If a phone is placed in the airbag deployment area and the airbag inflates, the phone may be propelled with great force and cause serious injury to occupants of the vehicle.</div> <div><ul style="list-style-type: none">Please turn off your mobile phone at a refueling point, and the same to the place where the use of two-way radio is prohibited.</div> <div>Aircraft Safety</div> <div><ul style="list-style-type: none">Please turn off your mobile phone before the airplane takes off. In order to protect airplane's communication system from interference, it is forbidden to use mobile phone in flight. Safety regulations require you to have permission from a crew member to use your phone while the plane is on the ground.If the mobile phone has the function of automatic timing power-on, please check your alarm setting to make sure that your phone will not be automatically turned on during flight.</div> <div>Battery Use</div> <div><ul style="list-style-type: none">Do not short-circuit the battery, as this can cause the unit to overheat or ignite.Do not store battery in hot areas or throw it into fire. Otherwise, it will cause explosion.</div> <div>5</div>	<div>independent scientific organisation ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.</div> <div>The guidelines use a unit of measurement known as Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 2.0 W/kg and the highest SAR value for this device when tested at the ear was 1.200 W/kg*. As mobile devices offer a range of functions, they can be used in other positions, such as on the body as described in this user guide.</div> <div>As SAR is measured utilising the device's highest transmitting power, the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum power required to communicate with the network.</div> <div>* The tests are carried out in accordance with EN 62209-1.</div> <div>Body Worn Operation</div> <div>Important safety information regarding radio frequency(RF) radiation exposure.</div> <div>To ensure compliance with RF exposure guidelines the phone must be used with a minimum of 15 mm separation from the body.</div> <div>Failure to observe these instructions could result in your RF exposure exceeding the relevant guideline limits.</div> <div>7</div>	<div>Key Functions</div> <div></div> <div><table><tr><th>Function</th><th>Description</th></tr><tr><td>Left soft key</td><td>Performs the function indicated at the left bottom of the screen.</td></tr><tr><td>Right soft key</td><td>Performs the function indicated at the right bottom of the screen.</td></tr></table></div> <div>9</div>	Function	Description	Left soft key	Performs the function indicated at the left bottom of the screen.	Right soft key	Performs the function indicated at the right bottom of the screen.				
Function	Description														
Left soft key	Performs the function indicated at the left bottom of the screen.														
Right soft key	Performs the function indicated at the right bottom of the screen.														
<div>ZTE中兴</div> <div>GSM</div> <div></div> <div>ZTE-G S506</div> <div>English User Manual</div>	<div>occurrences, please consult your doctor before playing video games on your phone or enabling a flashing-light feature on your phone. (The flashing-light feature is not available on all products.)</div> <div><ul style="list-style-type: none">Keep the phone out of the reach of small children. The phone may cause injury if used as a toy.</div> <div>Precautions While Driving</div> <div><ul style="list-style-type: none">Please pay attention to the traffic safety. Check the laws and regulations on the use of your phone in the area where you drive. Always obey them.Use hands-free function of the phone, if available.Pull off the road and park before making or answering a call if conditions require.</div> <div>Precautions for Medical Devices and Facilities</div> <div><ul style="list-style-type: none">When using your phone near pacemakers, please always keep the phone more than eight inches (about twenty centimeters) from the pacemaker when the phone is switched on. Do not carry the phone in the breast pocket. Use the ear opposite the pacemaker to minimize the potential for interference. Switch off the phone immediately if necessary.Some phones may interfere with some hearing aids. In the event of such interference, you may consult your hearing aids manufacturer to discuss alternatives.If you use any other personal medical device, please consult the manufacturer of your device to determine if it is adequately</div> <div>2</div>	<div><ul style="list-style-type: none">Do not connect the phone with any incompatible enhancement.Do not attempt to disassemble the mobile phone or battery.Do not store the phone with flammable or explosive articles.Do not charge the mobile phone without battery.</div> <div>Precautions for Potentially Explosive Atmospheres</div> <div><ul style="list-style-type: none">Switch off your phone prior to entering any area with potentially explosive atmospheres, such as fueling areas, fuel or chemical transfer or storage facilities.Do not remove, install, or charge batteries in such areas. Spark in a potentially explosive atmosphere can cause an explosion or fire resulting in bodily injury or even death.To avoid possible interference with blasting operations, switch off your phone when you are near electrical blasting caps, in a blasting area, or in areas posted "Turn off electronic devices." Obey all signs and instructions.</div> <div>Precautions for Electronic Devices</div> <div><ul style="list-style-type: none">Some electronic devices are susceptible to electromagnetic interference sent by mobile phone if inadequately shielded, such as electronic system of vehicles. Please consult the manufacturer of the device before using the phone if necessary.</div> <div>Safety and General Use in Vehicles</div> <div><ul style="list-style-type: none">Safety airbag, brake, speed control system and oil eject system</div> <div>4</div>	<div><ul style="list-style-type: none">Do not disassemble or refill the battery. Otherwise, it will cause liquid leakage, overheating, explosion and ignition of the battery.Please store the battery in a cool dry place if you don't use it for a long period.The battery can be recharged for hundreds of times, but it will eventually wear out. When the operating time (talk time and standby time) is noticeably shorter than normal, it is time to replace it with a new one.Please stop using the charger and battery when they are damaged or show evidence of aging.Return the worn-out battery to the provider or dispose of it in accordance with environment regulations. Do not dispose of it in household rubbish.Please use original batteries or batteries approved by the phone manufacturer. Using any unauthorized battery may affect your handset performance or may cause danger of explosion, etc.</div> <div>Warning: If the battery is damaged, do not discharge it. If the leakage does come into contact with the eyes or skin, wash thoroughly in clean water and consult a doctor.</div> <div>RF Exposure</div> <div>Specific Absorption Rate (SAR)</div> <div>Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the</div> <div>6</div>	<div>Limitation of Liability</div> <div>ZTE shall not be liable for any loss of profits or indirect, special, incidental or consequential damages resulting from or arising out of or in connection with using this product, whether or not ZTE had been advised, knew or should have known the possibility of such damages. The user should refer to the enclosed warranty card for full warranty and service information.</div> <div>Note: The pictures and icons shown in the manual are just schematic drawings for function demonstration. If they are inconsistent with your handset, please take your handset as the standard. If the inconsistency exists in the manual because of the handset function updating, please refer to the follow-up public information from ZTE CORPORATION.</div> <div>8</div>	<div><table><tr><td>Center key</td><td>Press to confirm actions and make selections.</td></tr><tr><td>4-Way Navigation keys</td><td>These keys (UP, DOWN, LEFT and RIGHT) allow for navigation through menu options and quick accessing to some function menus.</td></tr><tr><td>Send key</td><td>Press to dial a phone number or answer a call.Press to view the call history in the standby mode.</td></tr><tr><td>End/Power key</td><td>Press to exit to the standby mode. Hold to switch on/off the phone.</td></tr><tr><td>Alpha numeric keys</td><td>Press to enter characters 0-9 and the alphabets from a-z.</td></tr></table></div> <div>Note: In this User Manual, "press a key" means to press the key and release it immediately, while "hold a key" means to press the key for at least two seconds and then release it.</div> <div>Battery</div> <div>The lithium ion battery of the mobile phone can be immediately used after unpacking.</div> <div>Installing the Battery</div> <div><ol style="list-style-type: none">Pull the battery cover from the notch on the top edge and remove the cover.Insert the battery by aligning the gold-coloured contacts with the contacts in the battery slot.</div> <div>10</div>	Center key	Press to confirm actions and make selections.	4-Way Navigation keys	These keys (UP, DOWN, LEFT and RIGHT) allow for navigation through menu options and quick accessing to some function menus.	Send key	Press to dial a phone number or answer a call.Press to view the call history in the standby mode.	End/Power key	Press to exit to the standby mode. Hold to switch on/off the phone.	Alpha numeric keys	Press to enter characters 0-9 and the alphabets from a-z.
Center key	Press to confirm actions and make selections.														
4-Way Navigation keys	These keys (UP, DOWN, LEFT and RIGHT) allow for navigation through menu options and quick accessing to some function menus.														
Send key	Press to dial a phone number or answer a call.Press to view the call history in the standby mode.														
End/Power key	Press to exit to the standby mode. Hold to switch on/off the phone.														
Alpha numeric keys	Press to enter characters 0-9 and the alphabets from a-z.														
<div><ol style="list-style-type: none">Push down the upper section of the battery until it clicks into place.Replace the battery cover and close it gently until you hear a click.</div> <div></div> <div>Remove the battery cover Push down the battery Replace the battery cover</div> <div>Removing the Battery</div> <div><ol style="list-style-type: none">Make sure that your mobile phone is switched off.Remove the battery cover.Pull the battery up and remove it from the mobile phone.</div> <div></div> <div>Remove the battery cover Pull up the battery from here</div> <div>Inserting the SIM Card</div> <div>Insert the SIM card as follows:</div> <div><ul style="list-style-type: none">Make sure that the phone is switched off and the charger is disconnected from the phone.Turn the phone over and remove the battery cover.</div> <div>11</div>	<div>shown in the diagram.</div> <div><ul style="list-style-type: none">Connect the other end of the travel adapter to the mains socket.When you charge the battery, the battery charging indicator appears.When the battery is fully charged, disconnect the charger.</div> <div></div> <div>Powering your Phone on/off</div> <div>Make sure that your SIM card is in your mobile phone and that the battery is charged.</div> <div>Hold the End/Power key to power on/off the phone. The phone will automatically search for the network.</div> <div>Writing text</div> <div><ul style="list-style-type: none">Change input mode: Press the #key to change the input mode (input modes: ABC, abc, =ABC, =abc, 123).Input letters: In ABC/abc mode, constantly press the corresponding letter key till the letter appears. In "=ABC/=abc" mode, press the corresponding letter key, then press Up/Down Navigation keys to select the letter you want.</div> <div>13</div>	<div>so it makes sense to add these numbers to your Phonebook. You can then access these numbers quickly and easily.</div> <div><ul style="list-style-type: none">Go to Menu → Phonebook → Add new contact.Edit the information and save it.You can also save a number right after you've made or received a phone call or a message from someone who is not yet in your Phonebook list.To delete someone from your Phonebook list, first select the name, then select Options → Delete.</div> <div>How to make and receive calls</div> <div>The most basic way to make a call is to input the number in the standby mode and press the Send key. You can also make a call from the Phonebook list.</div> <div><ul style="list-style-type: none">To call someone: Go to Menu → Phonebook → Contacts. Use the Up/Down Navigation keys to find the name of the person you want to call. You can also type in the first letter of the name of the person you want to call to find the right name, and press the Send key.To receive a call, press the Left soft key or the Send key.To end a call, press the End/Power key.To reject a call, press the End/Power key.</div> <div>Make sure that you are in an area with sufficient coverage to make calls. The strength of the network signal is indicated on the Status Bar of the screen.</div> <div>15</div>	<div>Options→Activate to activate a profile. Or you can select Options→Customize to edit a profile.</div> <div>Call logs</div> <div>Go to Menu→Call logs.</div> <div>Dialled calls, Received calls and Missed calls are saved in Call logs. If the records are full, the earliest saved records will be deleted automatically.</div> <div>How to Configure Call Settings</div> <div>Go to Menu→Settings→Call settings.</div> <div>You can set call waiting, call divert and call barring, and so on.</div> <div>How to Set your Phone</div> <div>You can adjust various settings of your phone. Go to Menu→Settings.</div> <div><ul style="list-style-type: none">Phone settings: Set input method, greeting text, and so on.Security settings: Set security features to protect you from unauthorized use of your phone and SIM card.Restore factory settings: Enter the phone password to restore to the factory settings. Some personal information might be lost if you use this function, so be careful.</div> <div>Note: You may be required to input the phone password in some of the security setting interfaces. The default password is 1122. Go to</div> <div>17</div>	<div>particular area. In the FM radio interface, you can press the Up/Down Navigation keys to adjust volume, press the Left/Right Navigation keys to tune the frequency, and press the Center key to pause. Select Options to enter the submenu, you can set the FM radio power on/off in Options.</div> <div>How to Use Services</div> <div>Go to Menu→Services. In Services you can use STK.</div> <div><ul style="list-style-type: none">STK</div> <div>SIM card Toolkit (STK) services are value-added services provided by your network provider.</div> <div>Your mobile phone supports STK service, but if your SIM card and network provider do not support the service, these functions can't be used.</div> <div>Declaration of RoHS Compliance</div> <div>To minimise the environmental impact and take more responsibility for the earth we live on, this document shall serve as formal declaration that the ZTE-G S506 manufactured by ZTE CORPORATION is compliant with Directive 2002/95/EC of the European Parliament -RoHS (Restriction of Hazardous Substances) with respect to the following substances:</div> <div>(1) Lead (Pb) (2) Mercury (Hg) (3) Cadmium (Cd) (4) Hexavalent Chromium (Cr (VI)) (5) Polybrominated biphenyls (PBB's)</div> <div>19</div>	<div>EC Declaration of Conformity</div> <div>It is hereby declared that following designated rodut:</div> <div></div> <div>Product Type: GSM Dual-Band Mobile Phone</div> <div>Model No: ZTE-G S506</div> <div>Complies with the essential protection requirements of the Radio and Telecommunication Terminal Equipment Directive (EC Directive 1999/5/EC) and the Electromagnetic Compatibility Directive(2004/108/EC).</div> <div>This declaration applies to all specimens manufactured identical to the samples submitted for testing/evaluation.</div> <div>Assessment of compliance of the product with the requirements relating to the Radio and Telecommunication Terminal Equipment Directive (EC Directive 1999/5/EC) was performed by American TCB(Notified Body No.0700), based on the following standards:</div> <div>21</div>										
<div><ul style="list-style-type: none">Remove the battery if it is already installed.Hold your SIM card with the cut corner oriented as shown and then slide it into the card holder with the gold-coloured contacts facing downward.Replace the battery first.Replace the battery cover.</div> <div></div> <div>Insert the SIM card</div> <div>SIM card (Subscriber Identity Module) is a micro-chip that holds your personal information such as names and phone numbers. Your phone won't work without it. If you already have contacts on your SIM card, they can be transferred in most cases.</div> <div>Charging the Battery</div> <div>Your phone is powered by a rechargeable battery. For maximum battery performance, it is recommended that you first use up the battery power and then charge it completely. A new battery's full performance is achieved only after three complete charge and discharge cycles.</div> <div><ul style="list-style-type: none">Connect your travel adapter to the bottom of your mobile phone as</div> <div>12</div>	<div><ul style="list-style-type: none">Input words: In "=ABC/=abc" mode, input any letter with a single key press. Press each key only once for every letter. The word changes after each key stroke. Predictive text input is based on a built-in dictionary. When you have finished writing the word and it is correct, confirm it by pressing the Left soft key, 0 key or the Center key. If the word is incorrect, press the Up/Down Navigation keys to view other matching words found in the dictionary.Input digits: In 123 mode, press digit key once to input a digit. In "=ABC/=abc" mode, press the corresponding digit key, then press Up/Down Navigation keys to find the number you want.Input symbol: Press the * key to enter the symbol mode, select the required symbol (common symbols) by pressing the Navigation keys and then press the Left soft key or Center key to confirm it.Input space: Press the 0 key to input space. It does not work in 123 mode.Delete character: Press the Right soft key to clear a character. Hold the Right soft key to delete all characters and clear the display.Move cursor to left or right: Among the text, press the Left/Right navigation keys to move the cursor to left or right.</div> <div>How to Add Contact to the Phonebook</div> <div>There are some numbers that you may want to call again and again,</div> <div>14</div>	<div>How to Send Messages</div> <div>You can use your mobile phone to send and receive messages.</div> <div><ol style="list-style-type: none">Go to Menu→Messages→Write message.Write your message. For more information on input method, see section 'Writing text'. When you finish writing a message, press Options→Send to edit the recipient. After you add the recipient, press Options→Send to send the message.</div> <div>How to Receive a Message</div> <div>Upon receiving a message, the mobile phone will alert you with a ringtone, prompt, or a new message icon.</div> <div><ol style="list-style-type: none">Press Read to open the new message. You can also go to Inbox to read the message.Use the Up/Down Navigation keys to view the message.While the message is open, press Options to reply, delete, or forward the message. You can also call back the sender or save the sender's number.</div> <div>You can also receive broadcast messages by using this mobile phone.</div> <div>Go to Menu→Messages→Voice mail, you can call the voice mail or edit the voice mail's name and number.</div> <div>Profiles</div> <div>Go to Menu→Settings→Profiles. You can select</div> <div>16</div>	<div>Security settings→Phone security→Change password to change the phone password.</div> <div>Organizer</div> <div>Go to Menu→Organizer.</div> <div><ul style="list-style-type: none">Calendar</div> <div>Enter Calendar, the calendar of the current month will be displayed on the screen and the current date will be marked by a background box in a special colour.</div> <div><ul style="list-style-type: none">Alarm</div> <div>You can view, and edit the alarm clock settings. You can also enable or disable the alarm.</div> <div><ul style="list-style-type: none">Calculator</div> <div>You can perform simple calculations. Press digit key to enter the number. Press Left/Right Navigation keys to select the operational character. Press OK to get the result.</div> <div>Note: This calculator has limited accuracy and rounding errors may occur especially in long division.</div> <div>FM radio</div> <div>Go to Menu→FM radio.</div> <div>With the radio, you can search for radio channels, listen to them, and save them on your device. Note that the quality of the radio broadcast depends on the coverage of the radio station in that</div> <div>18</div>	<div>(6) Polybrominated diphenyl ethers (PBDE's)</div> <div>(Compliance is evidenced by written declaration from our suppliers, assuring that any potential trace contamination levels of the substances listed above are below the maximum level set by EU 2002/95/EC, or are exempt due to their application.)</div> <div>ZTE-G S506 manufactured by ZTE CORPORATION, meets the require-ments of EU 2002/95/EC.</div> <div>Disposal of Your Old Appliance</div> <div></div> <div><ol style="list-style-type: none">When this crossed-out wheeled bin symbol is attached to a product, it means the product is covered by the European Directive 2002/96/EC.All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.</div> <div>For this product's recycling information based on WEEE directive, please send an e-mail to weee@zte.com.cn</div> <div>20</div>	<div><table><tr><td>Safety</td><td>EN 60950-1:2006/A11:2009</td></tr><tr><td>EMC</td><td>EN 301 489-1 V1.8.1; EN 301 489-7 V1.3.1; EN 55013:2001/1/A2:2006; EN 55020:2007;</td></tr><tr><td>Radio</td><td>EN 301 511 V9.0.2; 3GPP TS51.010-1 V9.4.0</td></tr><tr><td>Health</td><td>EN 50360:2001; EN 62209-1:2006; EN 62209-2:2010; IEC 62209-2 Edition1.0(2010-03); EN 50332-1:2000; EN 50332-2:2003</td></tr></table></div> <div>This declaration is the responsibility of the manufacturer:</div> <div>ZTE Corporation</div> <div>ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China</div> <div>Authorised person signing for the company: Xu feng Quality Director Of ZTE Corporation Name in block letters & position in the company</div> <div>Shenzhen, 15th Feb 2011</div> <div>Place & date</div> <div>Legal valid signature</div> <div>22</div>	Safety	EN 60950-1:2006/A11:2009	EMC	EN 301 489-1 V1.8.1; EN 301 489-7 V1.3.1; EN 55013:2001/1/A2:2006; EN 55020:2007;	Radio	EN 301 511 V9.0.2; 3GPP TS51.010-1 V9.4.0	Health	EN 50360:2001; EN 62209-1:2006; EN 62209-2:2010; IEC 62209-2 Edition1.0(2010-03); EN 50332-1:2000; EN 50332-2:2003		
Safety	EN 60950-1:2006/A11:2009														
EMC	EN 301 489-1 V1.8.1; EN 301 489-7 V1.3.1; EN 55013:2001/1/A2:2006; EN 55020:2007;														
Radio	EN 301 511 V9.0.2; 3GPP TS51.010-1 V9.4.0														
Health	EN 50360:2001; EN 62209-1:2006; EN 62209-2:2010; IEC 62209-2 Edition1.0(2010-03); EN 50332-1:2000; EN 50332-2:2003														